



Agrilaser® Lite

Easy to use

Range up to 1,000 meter

Fast and long-lasting results

Suitable for repelling most bird species

Environment and animal friendly



The compact solution to bird nuisance



Compact and lightweight

To make operation over long distances more accurate and safe, the Aerolaser Handheld is fitted with a red dot sight. The sight makes it possible for a bird controller to accurately aim the Aerolaser Handheld at the desired target before activating the laser.


Advanced laser technology

Bird Control Group dedicated years of research to develop the ultimate laser beam. This was accomplished by applying a combination of highly precise optics, filtering and light frequencies. The result is exceptional performance in bird repelling while maintaining eye safety for both humans and birds.

Technical specifications

| | |
|----------------------------------|------------------------------------------------------------|
| Laser class | 2M <i>(classified according to NEN EN 60825-1:2007)</i> |
| Laser beam color | Green |
| Service life laser source | 5,000 h |
| Power source | 2x CR123 battery |
| Power input | 3.6 VDC – 9 VDC |
| Energy consumption | 2 W |
| Dimensions | 195 (7.7) x 25 (1.0) mm (in) (LxWxH) |
| Weight | 180 g (6.3 oz) |
| Operating temperature | -5 °C to 45 °C |
| Storage temperature | -10 °C to 50 °C |

Range (m)

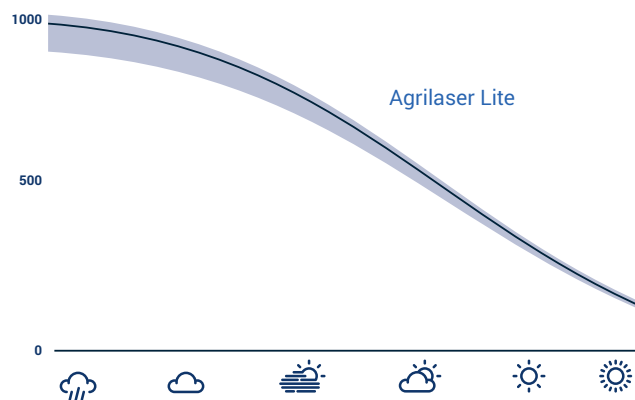

Light conditions

** actual range of effective bird repelling depends on environmental conditions*



LASER RADIATION
DO NOT STARE INTO THE BEAM
OR VIEW DIRECTLY WITH
OPTICAL INSTRUMENTS
CLASS 2M LASER PRODUCT

MAXIMUM OUTPUT < 50 mW
WAVELENGTH 532 nm
CLASSIFIED TO
NEN EN 60825-1:2007

LASER RADIATION
DO NOT STARE INTO THE BEAM
OR VIEW DIRECTLY WITH
OPTICAL INSTRUMENTS
CLASS 3R LASER PRODUCT

Contact

T +31 23 230 2030
E info@birdcontrolgroup.com
W birdcontrolgroup.com

Headquarters

Molengraaffsingel 12
2629 JD Delft
Les Pays-Bas

North American office

1 Broadway - 14th Floor
Cambridge, MA 02142
États Unis