


No. 485N/495N ANIMAL CAGE TRAP
ASSEMBLY INSTRUCTIONS

CAUTION


This Is A Metal Unit.
 Be Aware Of Sharp Edges.

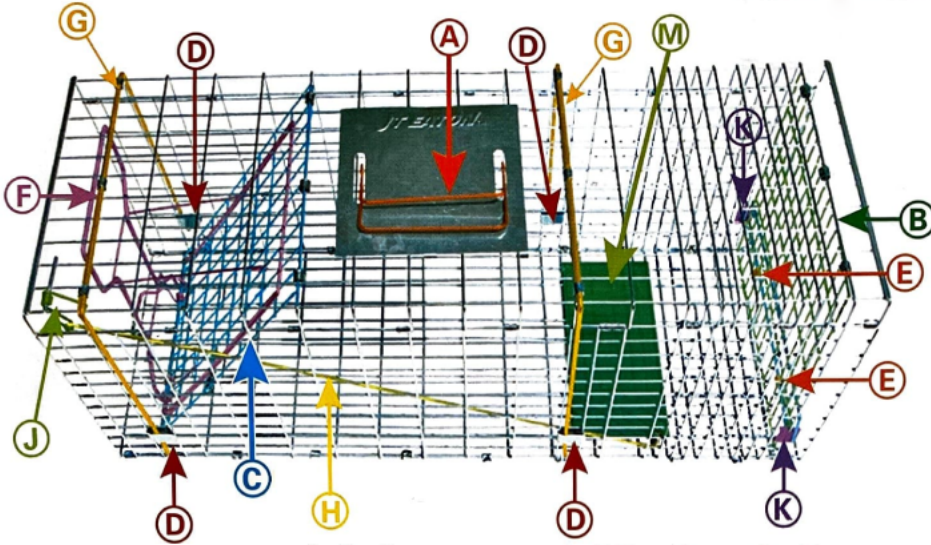


- | | |
|--|------------------------------------|
| A - Handles | G - U-Shape Support Bar (2) |
| B - Rear Door | H - Trip Wire with Hook End |
| C - Front Door | J - Set Hook |
| D - Support Clips (4) | K - Retainer Wire Guides (2) |
| E - Rear Door Retaining Wire Clips (2) | L - Retainer Wire (Shown At Right) |
| F - Front Door Spring Bar | M - Trip Plate |




1. Cut Plastic Ties.

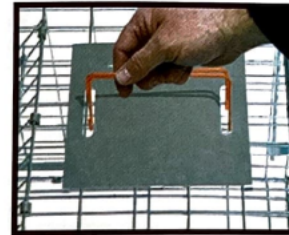

2. Pull Up On Both Handles (A) And Let Cage Fall Into Place.

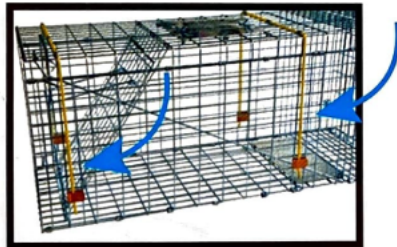

3. After Opening Cage, Make Sure Front Door (C) And Rear Door (B) Remain Inside The Trap, Lower U-Shape Support Bars (G) And Insert Ends Of Support Bars Into Support Clips (D).

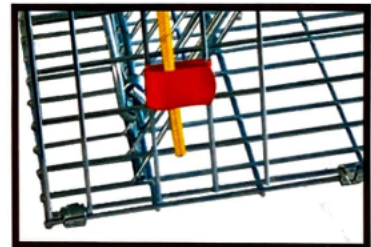

4. Make Sure U-Shape Support Bars (G) Are Completely Secured In Clip. Squeeze With Pliers Or Fingers To Prevent U-Shape Support Bars (G) From Popping Out.




5. With Rear Door (B) Down, Insert Straight End Of Retainer Wire (L) Through Bottom Hole Of Retainer Wire Guide (K) With Hook End Through Cage Wire. Continue Inserting Straight Part Of The Retainer Wire (L) Through Both Rear Door Clips (E) And Toward The Bottom Hole Of The Retainer Wire Guide (K) On The Opposite Side.



6. Before Retainer Wire (L) Is Through The Bottom Of Second Retainer Wire Guide (K), Bend Hook Down To Secure In Top Hole Of Retainer Wire Guide (K). (You Will Need To Pull Hook To Get In Top Hole Of Retainer Wire Guide (K).)



Unhooked.

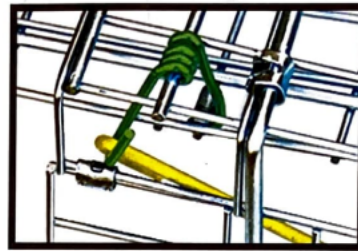



Hooked.

7. Hook Trip Wire (H) To Set Hook (J).
 Trip Wire Hook (H) Must Face Downward
 Or Trip Wire (H) May Fall Out.

No. 485N/495N ANIMAL CAGE TRAP

SETTING THE TRAP

**1. Place Trap In Location
 You Have Chosen.
 Put Bait Behind Trip Plate (M).
 If Bait Is Placed On Trip Plate (M)
 Animal May Not Put Enough
 Weight On Trip Plate To
 Close Door.**

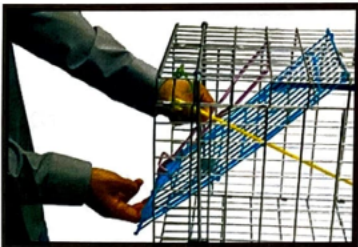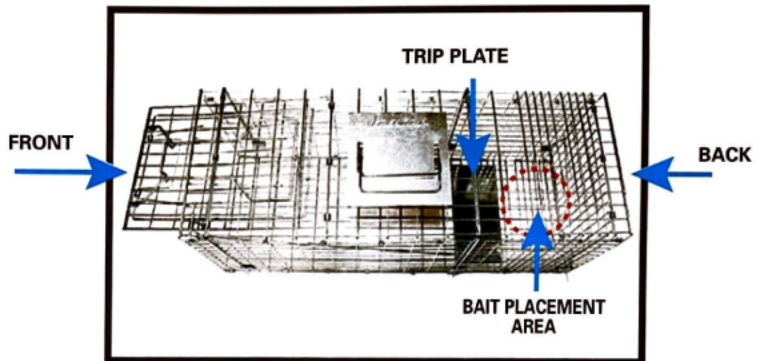

**2. Push Front Door Spring Bar (F) In
 And Pull Up On Door Edge To Raise
 Front Door (C). Hold Front Door (C) Up
 While Arming Set Hook (J).**



**3a. Pull Trip Wire Hook (H) Toward
 Front Of Trap Until Set Hook (J) Goes
 Under The Bar On The Front Door (C).**



**3b. Catch Can Be Adjusted To Light Or Heavy.
 Heavy Set Trap Is Shown. Move Trip Wire (H)
 Back On Set Hook (J) For Light Set.**

**NOTE: If The Set Hook (J) Does Not Stay Positioned Under The Front Door (C), The Hook Mechanism Can Be Adjusted
 Using Pliers To Move The Set Hook (J) Forward Or The Hook Mechanism Back.**

**Trap Is Now Ready For Use.
 Check Trap Frequently.**